




THUNDAFLO DRAINAGE SYSTEM C170 SERIES IN-LINE SUMP

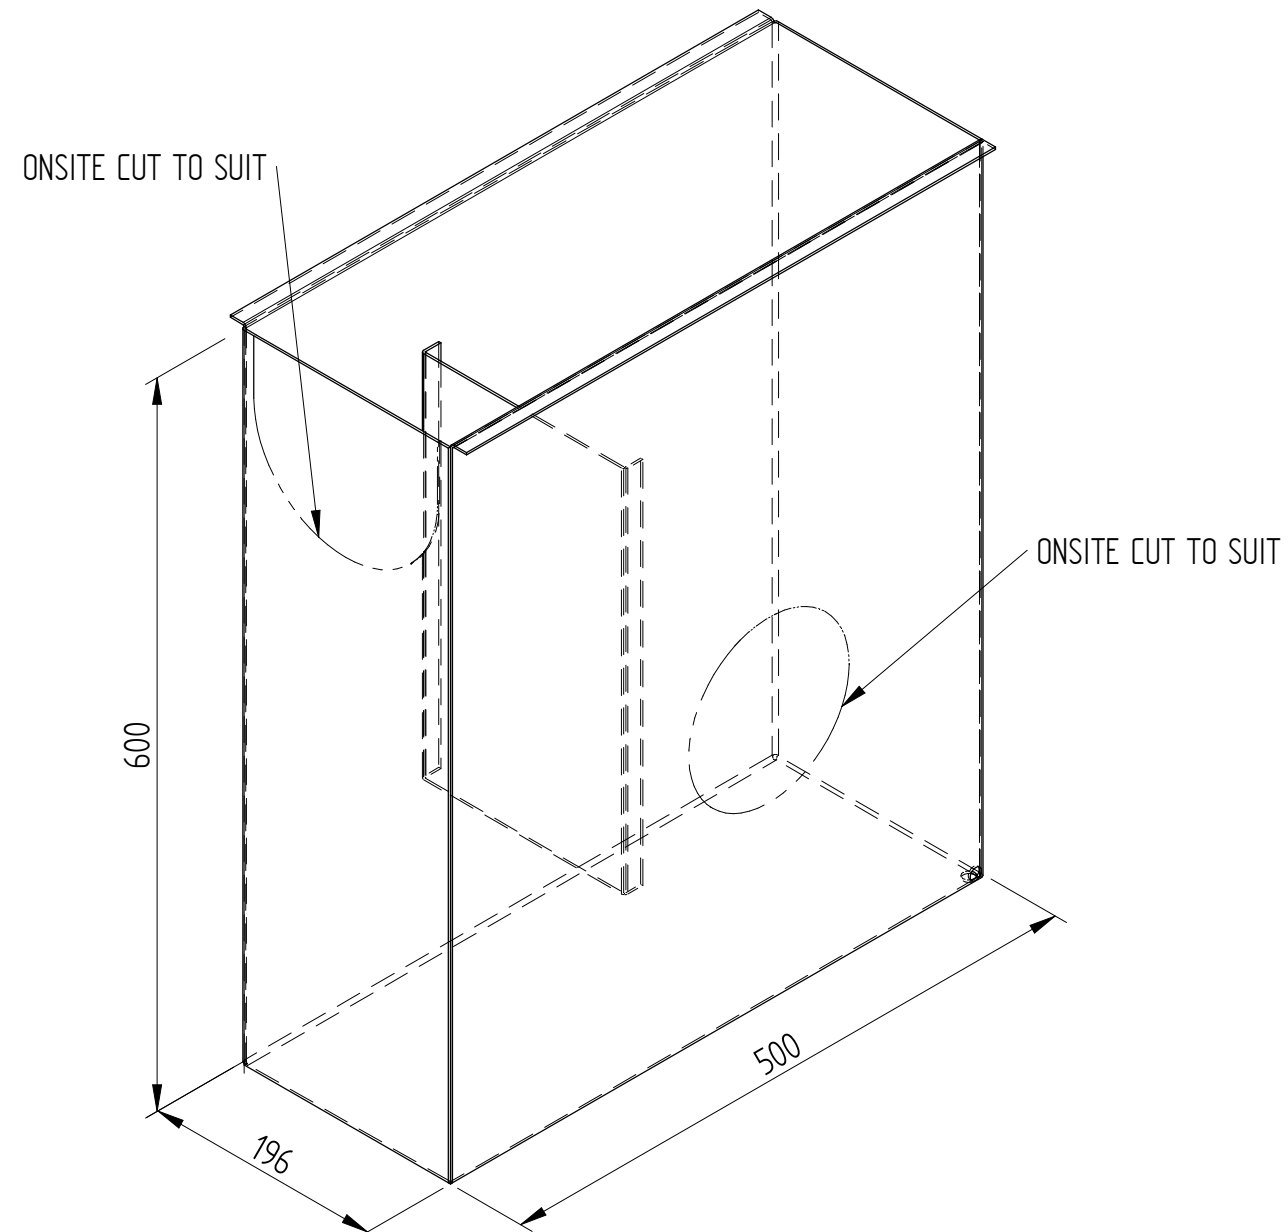

NOTES:

OUTLET IS CUT ON SITE TO SUIT LOCATION AND DIAMETER.

SEAL THE GAP BETWEEN THE HOLE AND OUTLET PIPE WITH:

- SILICON SEALANT OR
- DENSE TENSO TAPE OR
- UNISEAL™

PRIOR TO THE CONCRETE POUR.

A UNISEAL™ CAN BE PURCHASED FROM WWW.UNISEAL.CO.NZ